


Code Lock Module (COM 611-02)

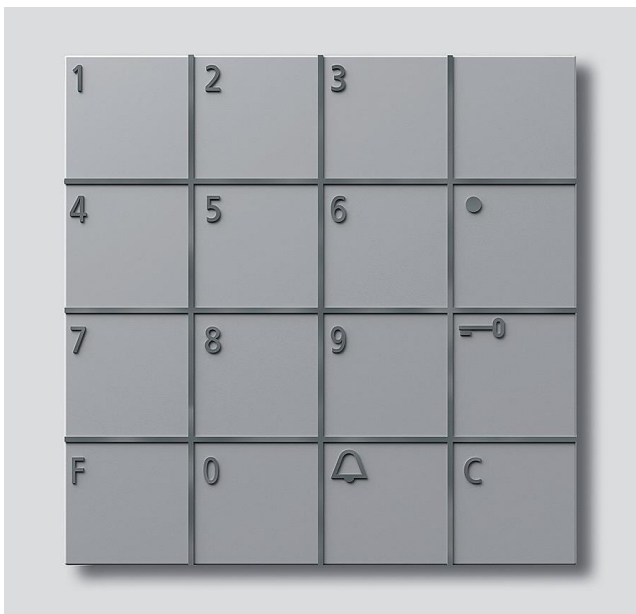

Product Details

Code lock module as an input unit for the placement of codes for control functions in conjunction with the Siedle Vario bus.

Performance features:

- in conjunction with entrance controller EC 602-... for setting control function and access control codes. Programming takes place using PRI 602-... or PRI 602-... USB and provided PRS 602-...
- in conjunction with door controller IP TCIP 603-... for setting control function and access control codes. Programming via web browser
- Operation with call controller RC 602-..., for programming codes for door calls, a C button to delete incorrect entries and a DR button for direct door release. This door release function can additionally be controlled by a time switch provided by the user. An integrated LED can be used via an external potential-free contact as a status indication.

Specifications:

Dimensions (W x H x D)	3.9" x 3.9" x 1.1"
Operating voltage:	12 V AC
Operating current:	max. 100 mA
Protection system:	IP 54
Ambient temperature:	-4°F - 131°F