

Product description

The DECT repeater extends the send and receive range of video communication from DECT telephones. It is compatible with the Siedle Scope S 851-... and the Smart Gateway Mini SGM 650-...

Performance features:

- Up to 6 repeaters with S 851-... and SGM 650-...
- Range outdoors up to 300 m, indoors up to 50 m
- Country-specific repeater (including adapter)
- Simple commissioning using range status display
- Operating status, range and communication status displays

Specifications



Operating voltage:	100–240 V AC 50/60 Hz
Operating current:	max. 50 mA
Protection system:	IP 40
Protection class:	II
Ambient temperature:	+5 °C to +40 °C
Dimensions (mm) W x H x D:	61 x 120 x 67

Article information

Article designation	Article description	Colour/Material	Article no.
DR 800-0 EU	DECT Repeater	White	044817
DR 800-0 GB	DECT Repeater	White	048665
DR 800-0 US/CA	DECT Repeater	White	048666


DECT Repeater
DR 800-0 EU

Page 2

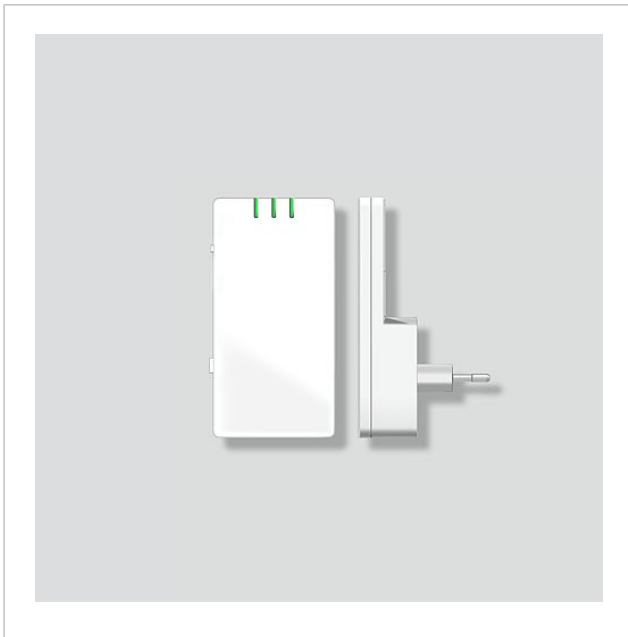

DECT Repeater
DR 800-0 EU

Page 3



DR 800-0 DECT Repeater

Product information

755 kB

[Download](#)

DR 800-0 DECT Repeater

Declaration of Conformity

376 kB

[Download](#)