

Product description

Secondary signal unit with electronic three-tone chime, alpha and continuous tone.

Subtle low-profile design for surface-mounting. Volume adjustable from outside, appr. 86 dB(A), operation in 12 V bell systems.

Specifications

Operating voltage:	12 V AC, 16–20 V DC
Operating current:	max. 200 mA
Dimensions (mm) W x H x D:	107 x 107 x 25

Article information

Article designation	Article description	Colour/Material	Article no.
NS 511-01	Secondary signal unit	White	031520

Secondary signal unit
NS 511-01

Page 2




Spare parts

Article designation	Article description	Colour/Material	Article no.
TLM 611/612/640/650-...	Loudspeaker	Miscellaneous	029074

Secondary signal unit
NS 511-01

Page 3

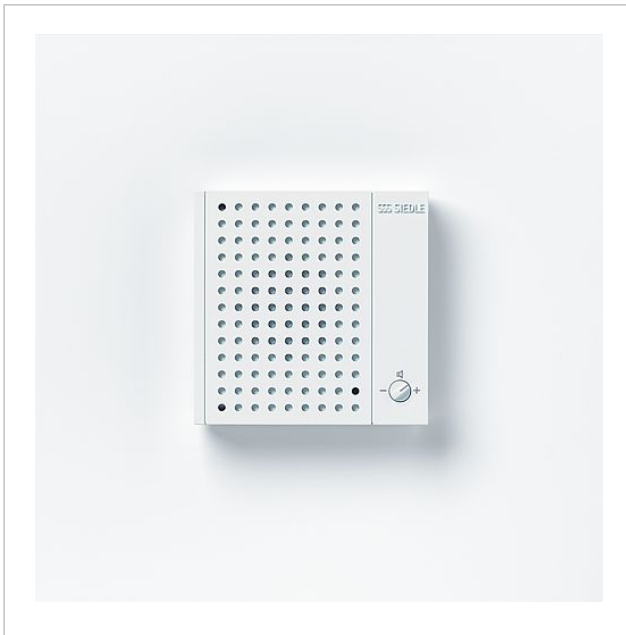



NS 511-01 Auxiliary signalling unit

Product information

392 kB

[Download](#)

Declaration of Conformity

469 kB

[Download](#)