

Product description

Socket module with flap and attached PE socket.


Integration of the SDM 600-... is only possible in the KSF 6... due to the mounting depth.

Specifications

Mounting depth (mm):	95
Protection system:	IP 54
Ambient temperature:	-20 °C to +55 °C
Height of structure (mm):	5
Dimensions (mm) W x H x D:	99 x 99 x 100

Article information

Article designation	Article description	Colour/Material	Article no.
SDM 600-0 BG	Socket module	Micaceous amber	038912
SDM 600-0 DG	Socket module	Micaceous dark grey	038913
SDM 600-0 SH	Socket module	High gloss black	038911
SDM 600-0 SM	Socket module	Silver metallic	039043
SDM 600-0 W	Socket module	White	039042
SDM 600-0 WH	Socket module	High gloss white	038910






Accessories

Article designation	Article description	Colour/Material	Article no.
Vario 611 BG	Repair paint	Micaceous amber	039945
Vario 611 DG	Repair paint	Micaceous dark grey	039946
Vario 611 SH	Repair paint	High gloss black	039943
Vario 611 SM	Repair paint	Silver metallic	039937
Vario 611 W	Repair paint	White	039936
Vario 611 WH	Repair paint	High gloss white	039944

Socket module
SDM 600-0

Page 3

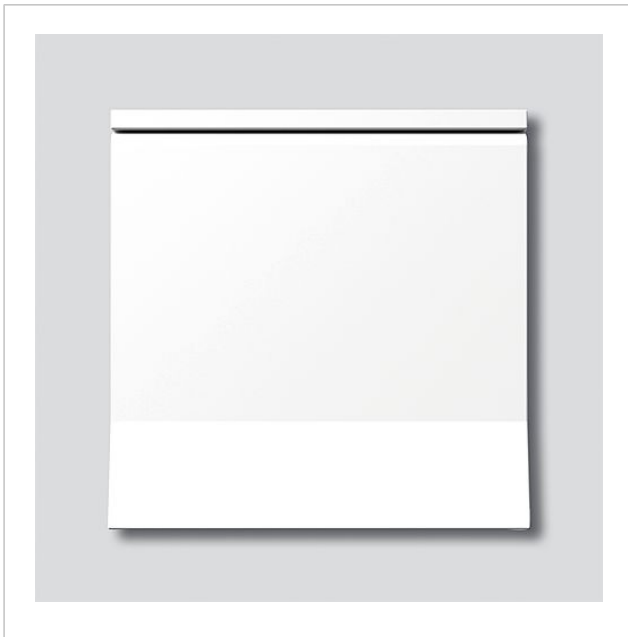



Socket module
SDM 600-0

Page 4

SDM 600-0 Socket module
SDM 600-...

Product information

916 kB

[Download](#)

Declaration of Conformity

31 kB

[Download](#)