


FaceEntry XS (IDORSS-6100)

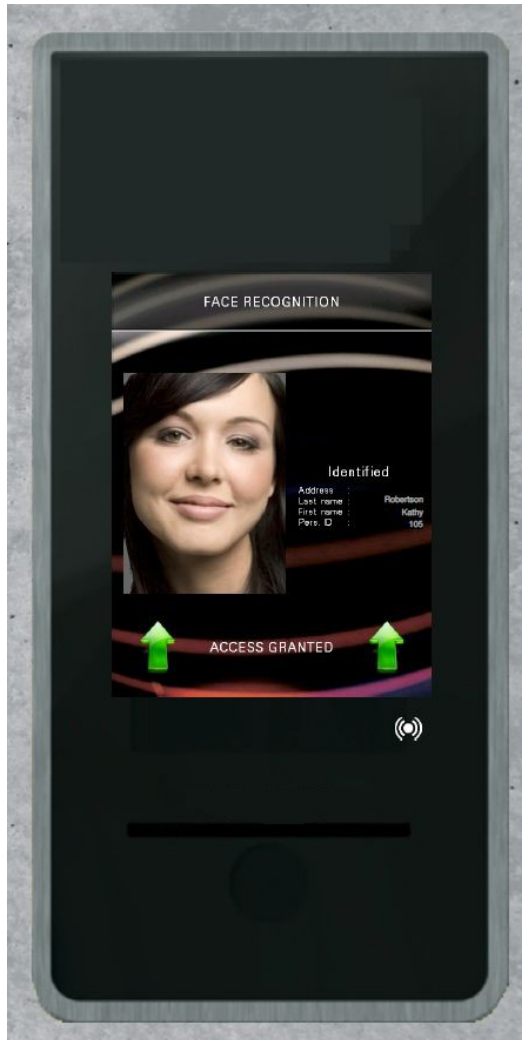

Product Details

- 2D/3D facial recognition system for biometric access control
- 3D-option with stripe protection for highest security
- Optional RFID reader for biometric verification of card holder
- PIN code for access
- Fully automatic operation without user interaction
- Touchscreen user interface for time & attendance function and feedback
- Connection via Ethernet and 2-wire
- Surface of flush mounting
- Stand-alone solution

Specifications:

Surface Mount Dimensions (W x H x D):	3.8" x 7.8" x 1.8"
Flush Mount Dimensions (W x H x D):	3.8" x 7.8" x 1.5"
Flush Cut Out Dimensions (W x H x D):	3.2" x 7.1" x 1.1"
Operating voltage:	6-48 V DC
Ambient temperature:	32°F - 104°F